



主要技术参数 Specifications


- ◆ 量程: 0-0.25/0-25MPa;
- ◆ 精度: ± 1.6 级
- ◆ 工作温度: $-45 \sim +150^{\circ}\text{C}$
- ◆ 膜片材质: 316L
- ◆ 接液材质: 316+丁晴橡胶
- ◆ 接口: 螺纹M20*1.5, 1/2" NPT
- ◆ 工作介质: 硅油 等
- ◆ Range: 0-0.25/0-25MPa;
- ◆ Accuracy: $\pm 1.6\%$
- ◆ Working Temperature: $-45 \sim +150^{\circ}\text{C}$
- ◆ Diaphragm Material: 316L
- ◆ Wetted material: 316+BUNA
- ◆ Connection: Thread M20*1.5, 1/2" NPT
- ◆ Filling liquid: Silicone oil

特殊项 Special items

- ◆ 高温选项: 最高温度 240°C
- ◆ 膜片材质: 哈C, 钽, 钛, 蒙乃尔合金, 316L表面喷涂PTFE
- ◆ 接液材质: 304, 316, 316L (或+PTFE)
- ◆ 接口: 可根据客户要求订制
- ◆ 工作介质: 根据介质不同可选氟油 $-60 \sim +120^{\circ}\text{C}$, 食用油 $-20 \sim +160^{\circ}\text{C}$
- ◆ High temperature: Max 240°C
- ◆ Diaphragm material: Hastelloy C, Tantalum, Titanium, Monel, 316L PTFE coated
- ◆ Wetted material: 304, 316, 316L (or PTFE coated)
- ◆ Connection: other on request
- ◆ Filling liquid: As different media, optional fluorocarbon oil, $-60 \sim +120^{\circ}\text{C}$, Food oil, $-20 \sim +160^{\circ}\text{C}$

几何尺寸图 DIMENSIONS

单位 Unit (mm)

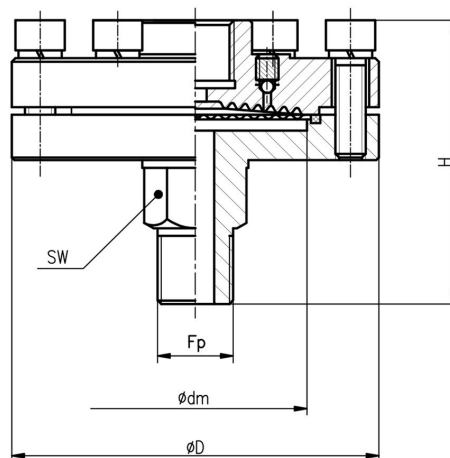

D	dm	Fp/Fm	H	SW
61.5	42	M20 X 1.5/NPT1/2	66	24
77	42	M20 X 1.5/NPT1/2	71	24
97	61	M20 X 1.5/NPT1/2	72	24
97	30	M20 X 1.5/NPT1/2	72	24