


LCD function

Display module is used for field adjustment to complete all the parameters setting and site configuration before measuring. The internal and external buttons can realize its normal use in safe and hazardous areas. (For stainless steel housing, only internal buttons can be used in security zones. The operation methods of buttons are totally same as the means of standard aluminium alloy housing.)

Products with LCD



- ①Modify parameters
- ②Enter settings
- ③Confirm and enter the next menu


Asia : S/M/Z

The display module of products with LCD is installed in the terminals, which can be viewed through the lenses

Keys operation

For example, factory setting parameters; pressure range -10-100kPa, display unit kPa, operate in the atmosphere


SetPV=0

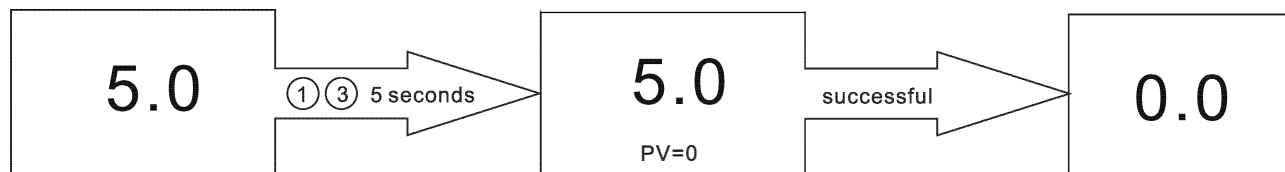


Factory reset



Detailed operating instructions

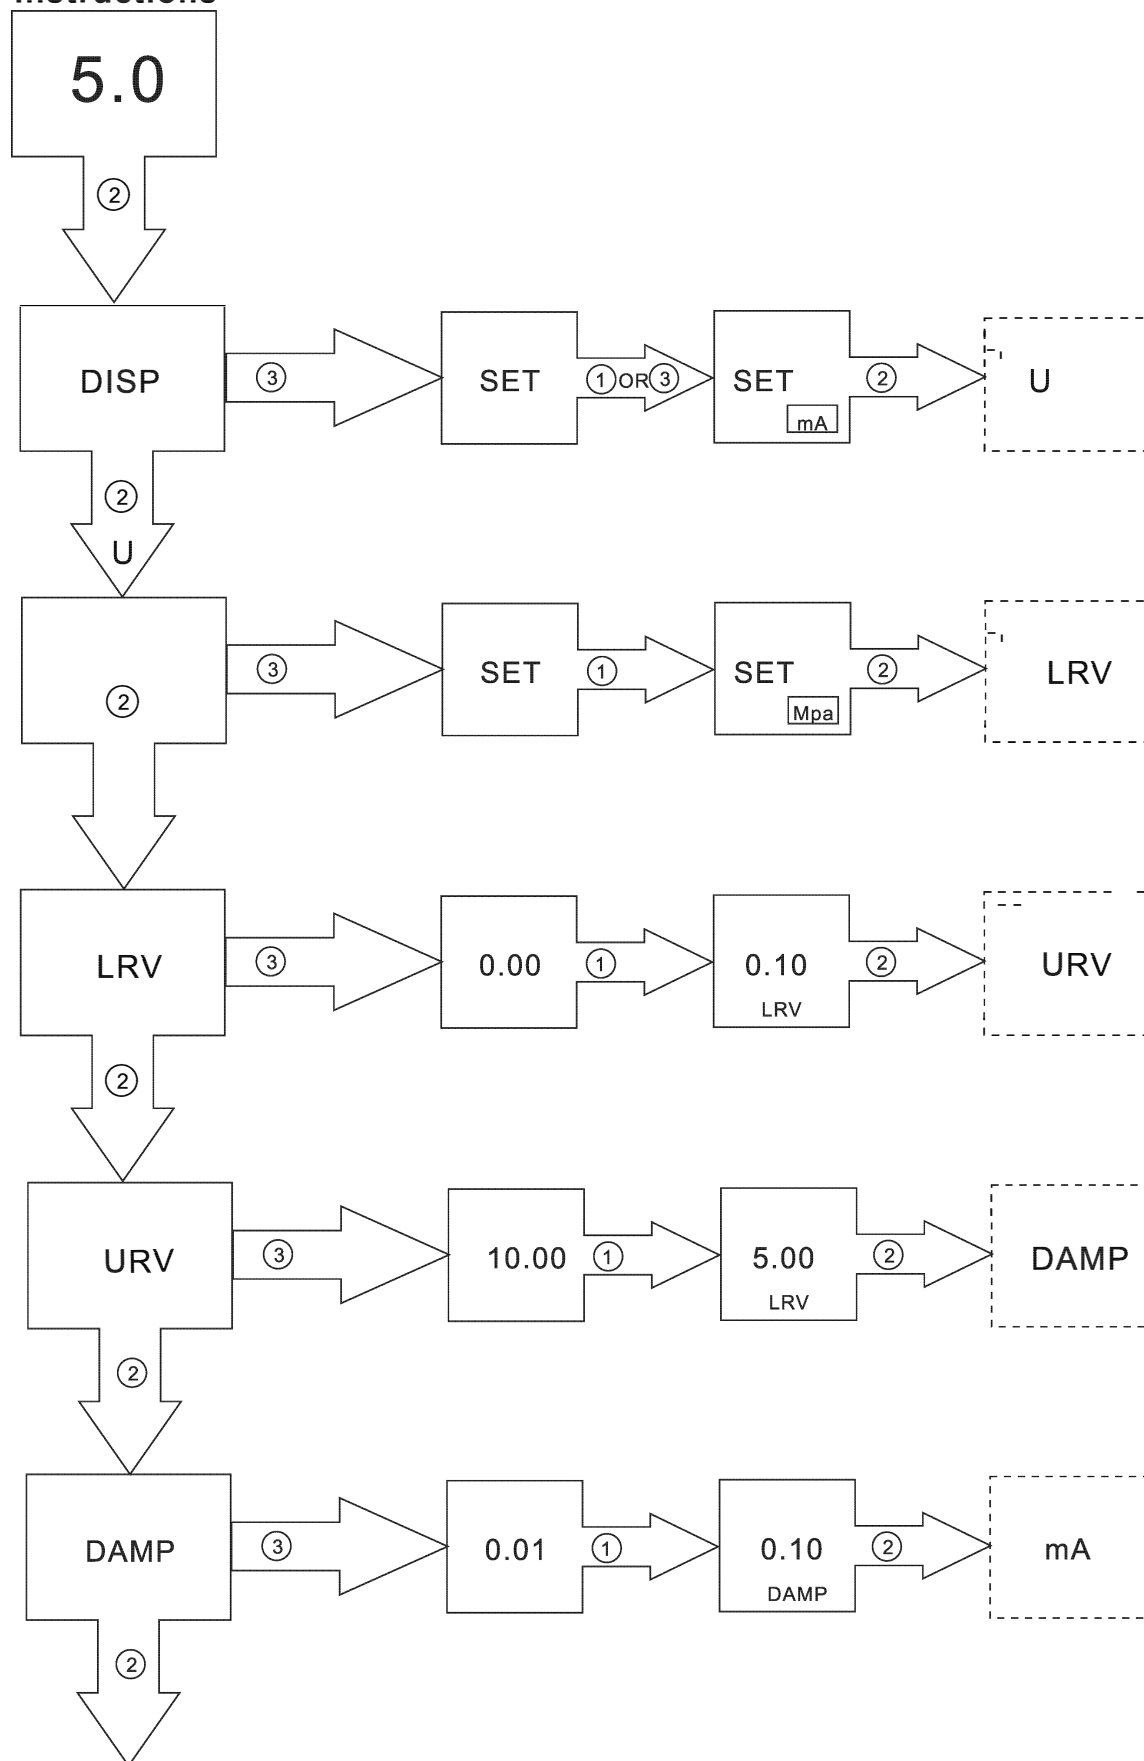

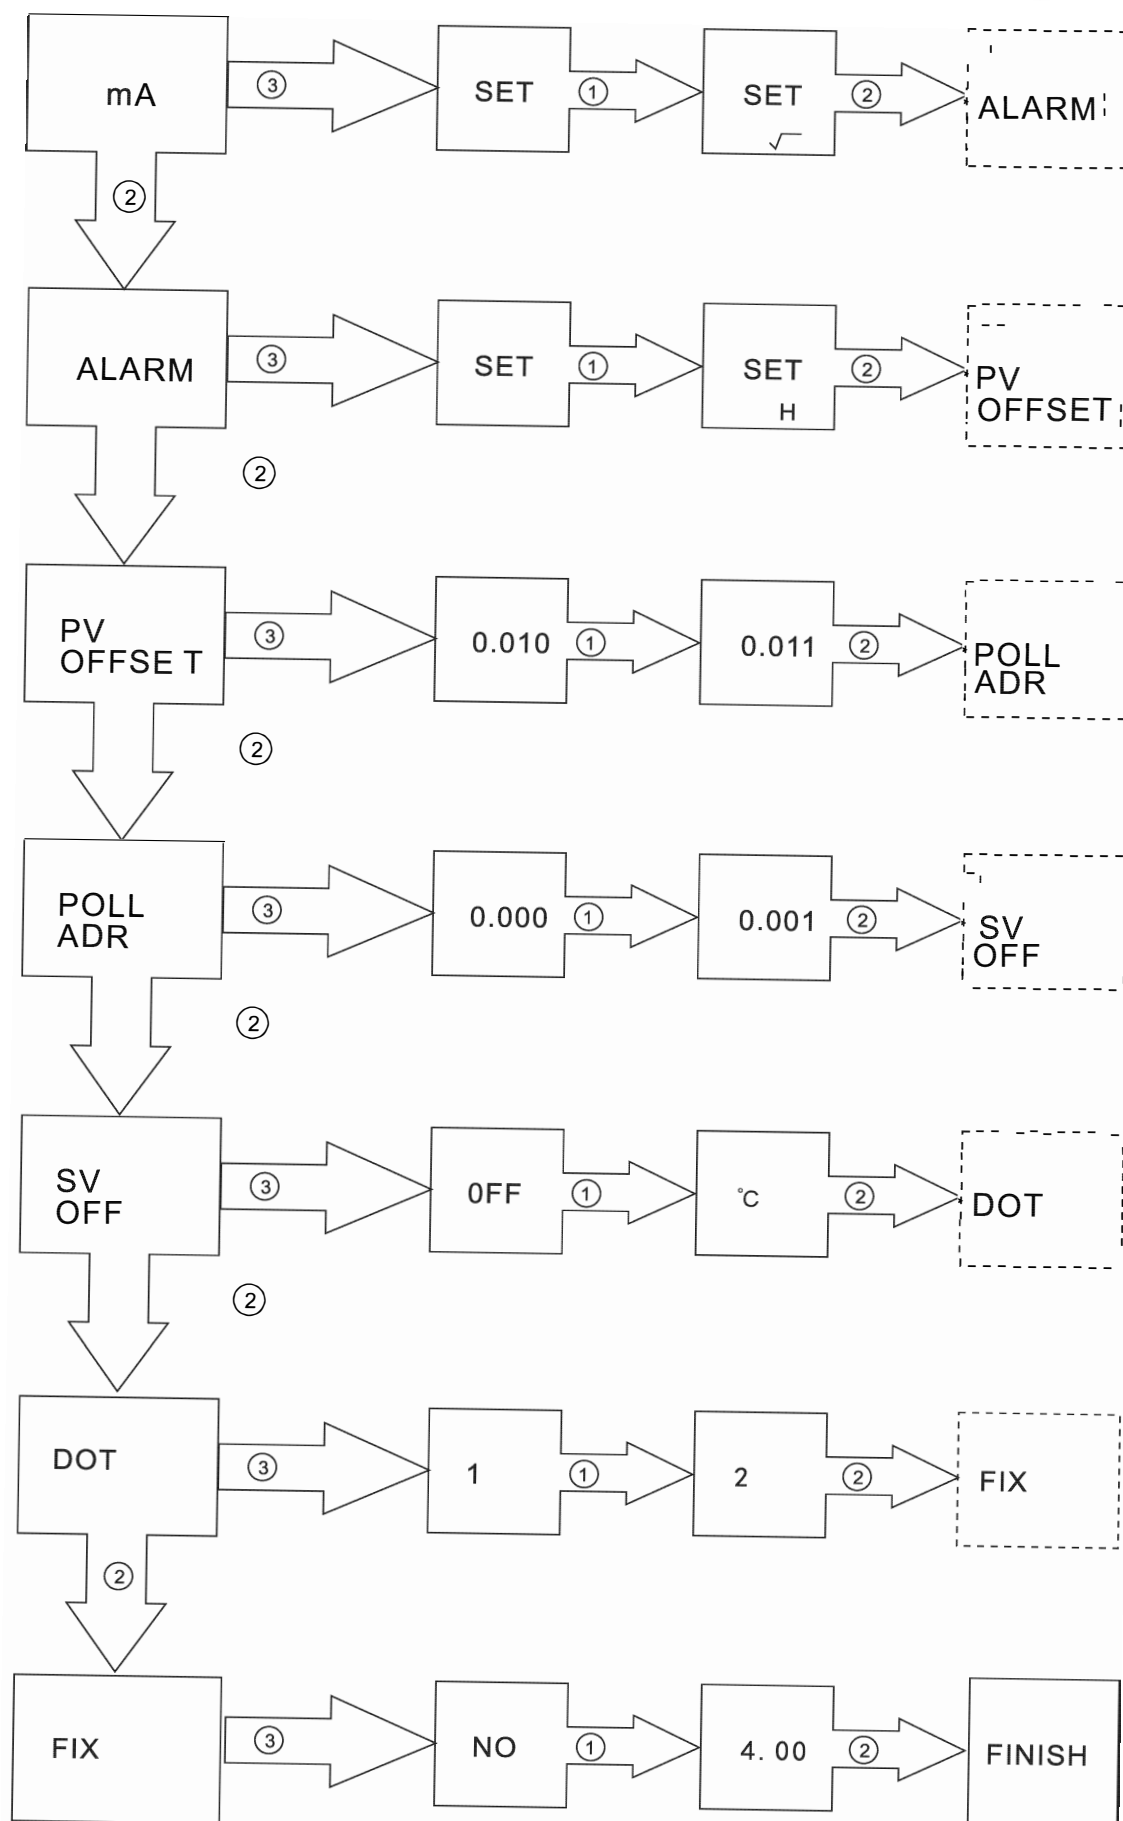

Parameters table

Display mode

%	Percentage
PV	Process variable
mA	Current

Square root display mode

%	%
PV	kPa
mA	mA

Units

kPa
MPa
bar
psi
mmHg
mmH2O
mH2O
inH2O
ftH2O
inHg
mHg
TORR
mbar
g/cm2
kg/cm2
Pa
ATM
osi
mm
m

Lower range value

-19999-99999

Upper range value

-19999-99999

Damping time

0-100S

Output signal type

Square root
Linearity

Fault alarm signal

No	Saturation output to 20.8mA or 3.8mA
H	20.8mA
L	3.8mA

Fault alarm signal

1) -1.2 | URL-LRL | ≤ poffset
≤1.2 | URL-LRL |

2) When current pressure< poffset, and poffset>0, then current pressure= poffset;

3) When current pressure<0, and poffset#0, then current pressure=0

Optional address 0-15

0: Broadcast address

1-15: Non-broadcast address
(fixed analog output to 4mA)

Display mode

OFF	None
℃	Celsius
°F	Fahrenheit
K	Kelvin

Dot options

NON	No decimals
1	Max one decimals
2	Max two decimals
3	Max three decimals

Loop current output

NO	Not fixed
3.800	fixed to 3.8mA
4.000	fixed to 4.0mA
20.000	fixed to 20.0mA
20.800	fixed to 20.8mA